



Chapter 22 Electric Fields

Physics II – Part I
Wen-Bin Jian

Department of Electrophysics, National Chiao Tung University

Discovery of Charges

History

0600 BC – Thales of Miletus (Greek)

The properties of amber are changed when rubbed.

Shows power to attract and repel straws and dry leaves.



0321 BC – Theophrastus (Greek)

0070 AD – Pliny The Elder (Greek)

1600 AD – William Gilbert (Englishman)

Dry air is better to generate electrify substances.

1745 AD – Ewald G. von Kleist (German), Prof. Pieter van Musschenbroek (Dutch)

Leyden jar was invented.



<http://www.codecheck.com/cc/LeydenJar.html>

Discovery of Charges

History


1752 AD – Benjamin Franklin (American)
Kite experiment, lightning experiment

1750 AD – Benjamin Franklin (American)
Choosing the positive electricity
<https://www-spod.gsfc.nasa.gov/Education/woppos.html>

1785 AD – Charles Coulomb (French)
torsion balance, published 7 papers

1798 AD – Henry Cavendish (British)
torsion balance, gravitational force
not published work and discovered by
James Maxwell in 1879

<https://www.awesomestories.com/asset/view/LIGHTNING-in-a-BOTTLE>

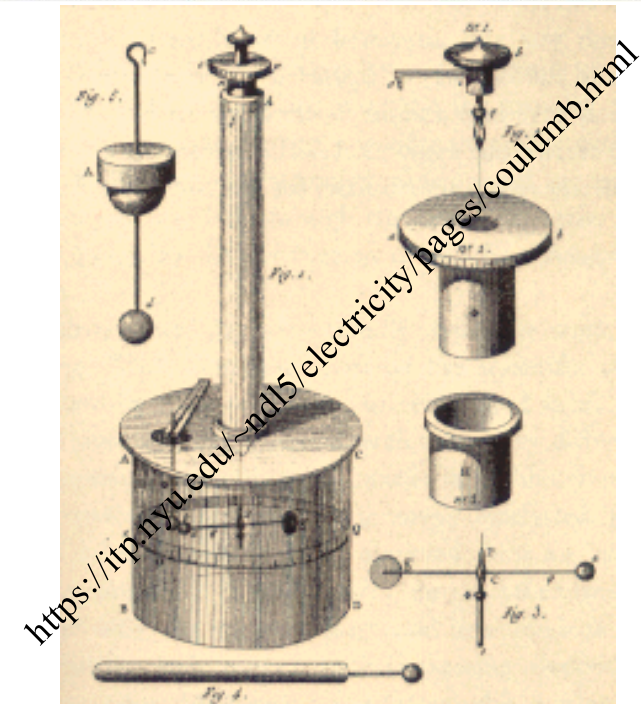

Electrifying – Charge Transfer


Electron affinity of an atom or a molecule: $X_g + e^- \rightarrow X_g^-$.

For example, the fluorine gas atom: $F_g + e^- \xrightarrow{-328 \text{ kJ/mol}} F_g^-$.

Electron affinity of a bulk: $-(E_{Vacuum} - E_C)$

Work function of a bulk: $E_{Vacuum} - E_{Fermi Level}$

Energy Band Diagram Introduced

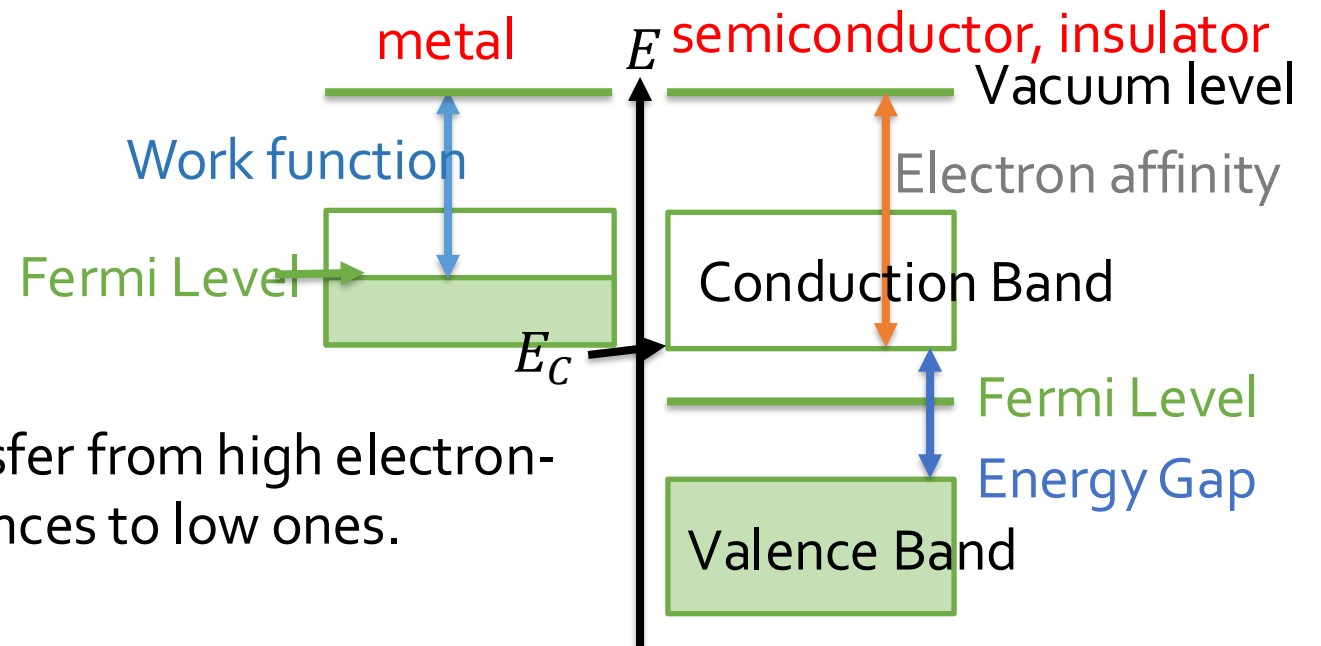



Electrons transfer from high electron-affinity substances to low ones.

glass nylon wool Pb silk Al cotton steel brass teflon


Electrifying – Charge Transfer

Repulsive
Forces
Between
Charges of
Same-Polarity


The concept of grounded – connected to the Earth:

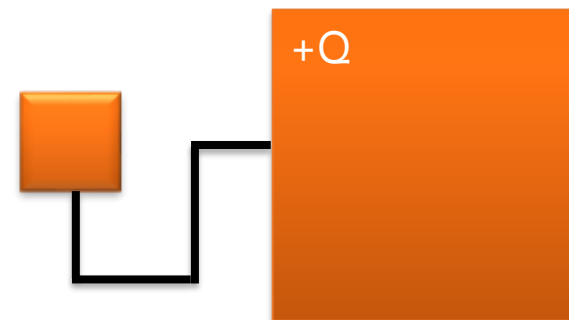

The concept of zero electric field inside the conductor:

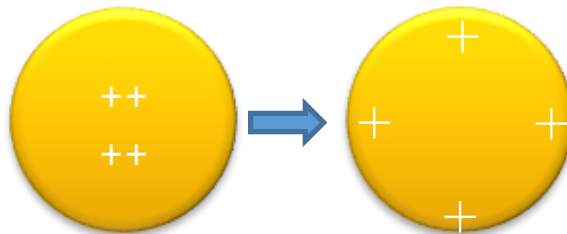

The concept of inductive electrifying:

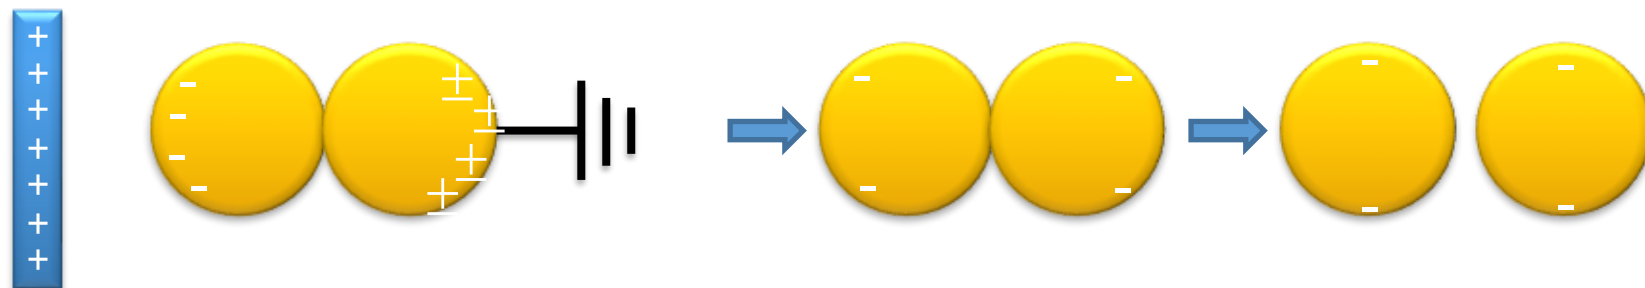



Physical Properties of Charges

Unit of Charges

Definition of charge unit: One Coulomb is the total charge collected from the current of one Ampere for one second.

Definition of current unit: One Ampere is the current in both of the two parallel conducting wires separated for 1 m in vacuum that generates a force per unit length of 2×10^{-7} N/m.


Charge quantization: There is one single electron in one neutral hydrogen atom. $1 e = 1.602 \times 10^{-19}$ C

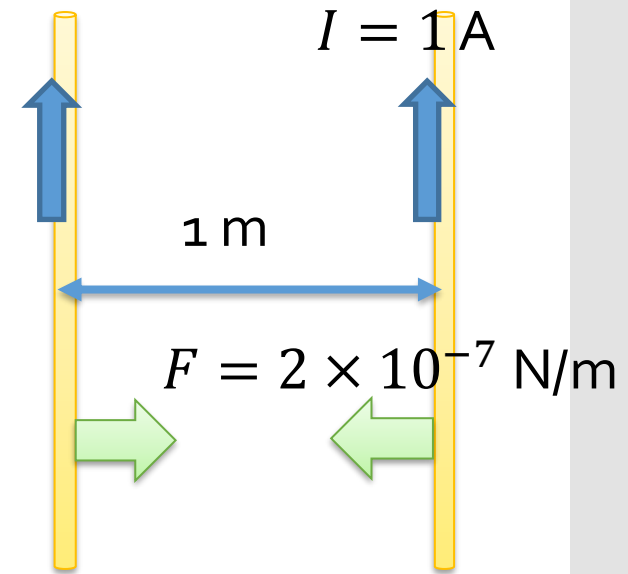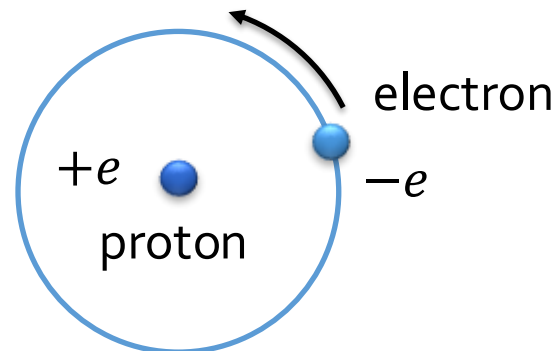


Physical Properties of Charges

Charge Conservation

Charge conservation: If one electron of charge $-e$ is removed from the neutral hydrogen atom, the hydrogen atom is ionized with a charge of $+e$.



Current flow model: The current flow is not the drifting process of charge carriers. It is more like information transmission. You can imagine a theme of the sitters changing their seats.

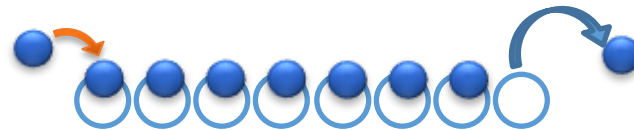

The Law for Static Electric Charges

Coulomb's Law

Displacement vectors:

$$\vec{r}_{AB} = \vec{r}_{AO} - \vec{r}_{BO}$$

The observer sits at B to look at A.



The force exerted on B by A is \vec{F}_{AB} .

Coulomb's Law:

$$\vec{F}_{BA} = \frac{kq_Aq_B}{r_{AB}^2} \hat{r}_{AB}$$

where $k = 1/4\pi\epsilon_0$ is $8.99 \times 10^9 \text{ N m}^2 / \text{C}^2$.

Here ϵ_0 is the permittivity of vacuum. The permittivity is a measure of a substance to resist the electric field.

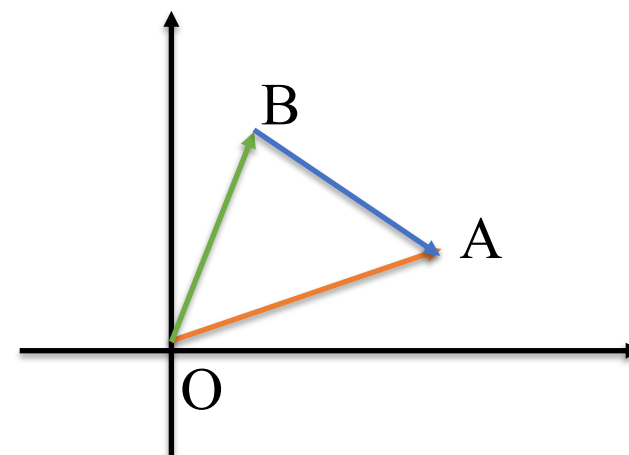

Natural Distance Dependency of The Coulomb Law

The Law of Inverse Square of Distance

The inverse square law confirms zero net electric forces inside a metal box.


$$\Delta Q_1 = \sigma r_1^2 \Delta \Omega$$

$$F_{1q} = \frac{kq\Delta Q_1}{r_1^2} = kq\sigma\Delta\Omega$$

$$\Delta Q_2 = \sigma r_2^2 \Delta \Omega$$

$$F_{2q} = \frac{kq\Delta Q_2}{r_2^2} = kq\sigma\Delta\Omega = F_{1q}$$


$$F_{net} = 0$$

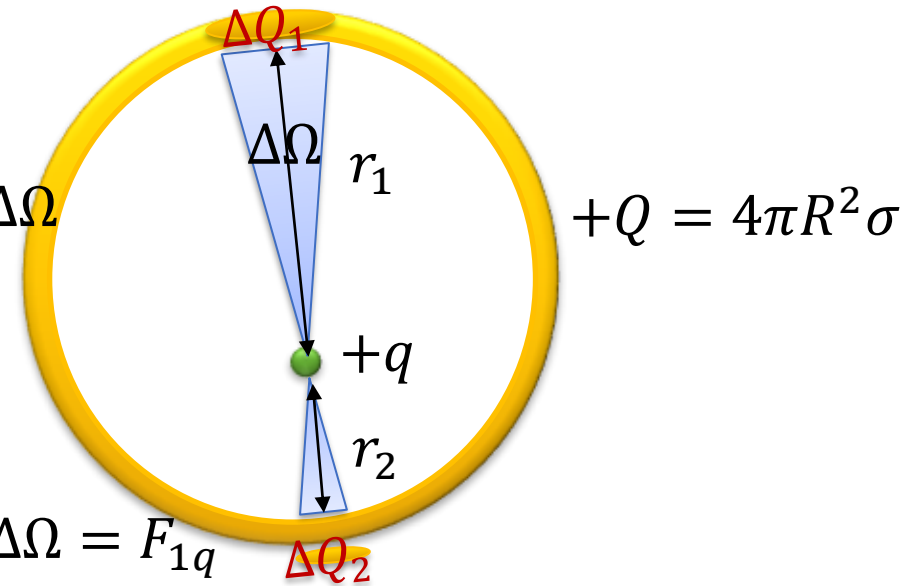


The Concept of Field

From Electric Force to Electric Field


For a configuration of charges in the space, we can calculate the pulling force if we put the other charge (test charge) in the space. The force is proportional to the test charge.

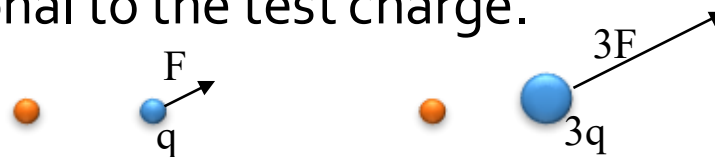

Even though you do not put the test charge in the space, the “field” to produce the force on the test charge still works in the space.

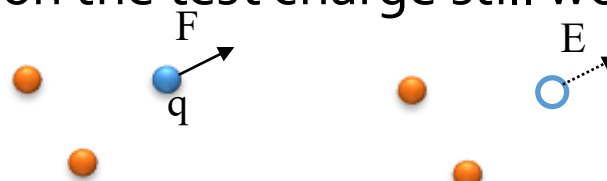

If you move the source charge to a new position, the force of charges at new positions will be felt by the test charge after a time of . The field signal transmit at the speed of light.

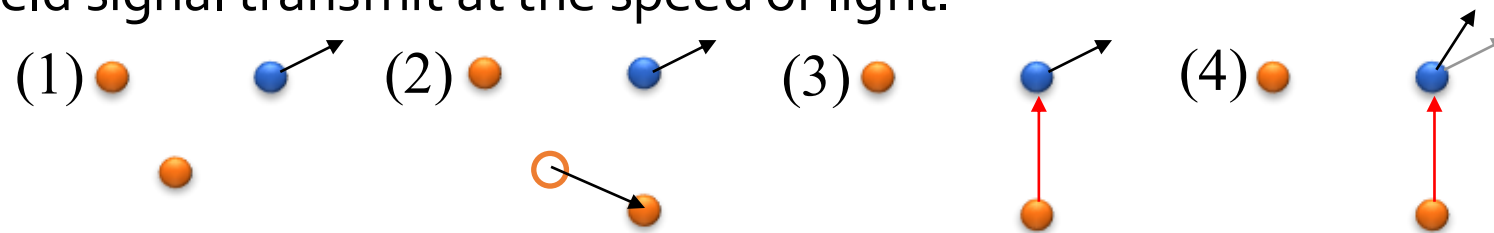

Coulomb's Law for Electric Fields


Direction and Magnitude of Electric Field

Coulomb's force for the test charge:

$$\vec{F}_{Qq} = \frac{kqQ}{r^2} \hat{r}$$

$$\vec{E}_{Qq} = \frac{\vec{F}_{Qq}}{q} = \frac{kQ}{r^2} \hat{r}$$

$$\vec{E}_Q = \frac{kQ}{r^2} \hat{r}$$

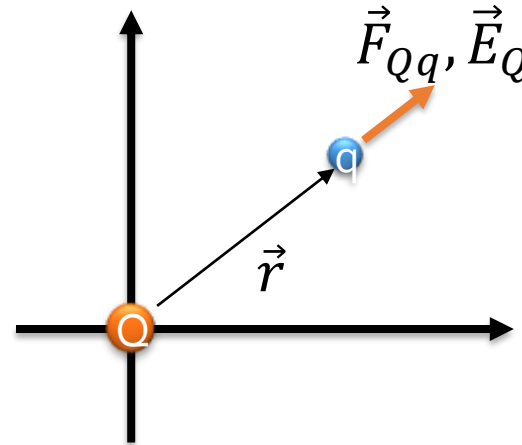

Unit of electric field: $1 \text{ N / C} = 1 \text{ V / m}$

Net electric field for an observer at the origin:

$$\vec{E}_{net} = \sum_{i=1}^N \frac{kq_i}{r_i^2} \hat{r}_{oi}$$

Electric Fields	N/C, V/m
in conductors	$1 - 10^{-2}$
bulb with tungsten wires	10^3
in lightning bolt	10^4
operation of transistor	10^6
at electron in H atom	10^{12}





Mapping of Electric Field

Electric Field Lines

Electric field lines start from positive charges and end on negative ones.

The lines are uniformly spaced entering or leaving a point charge.

The number of lines leaving a positive charge or entering a negative charge is proportional to the magnitude of the charge.

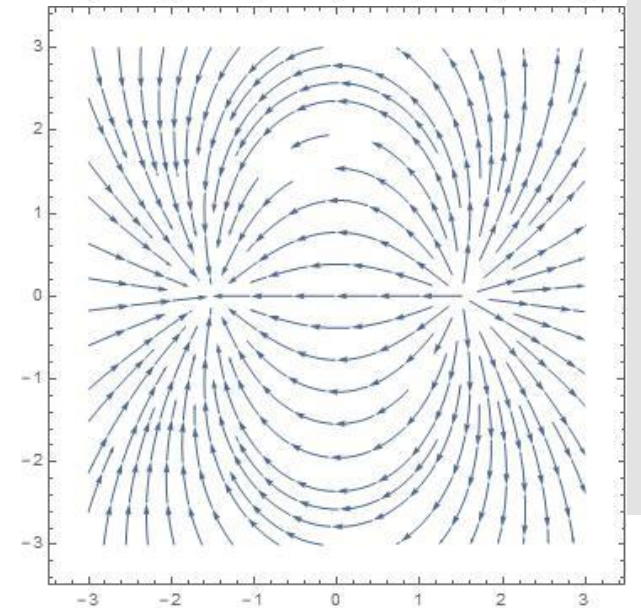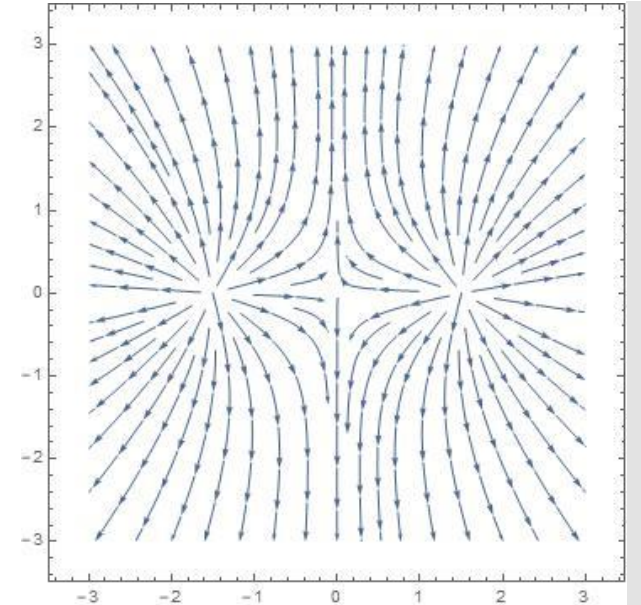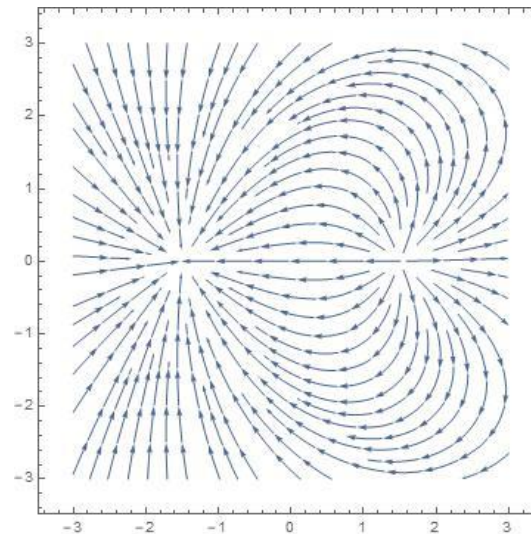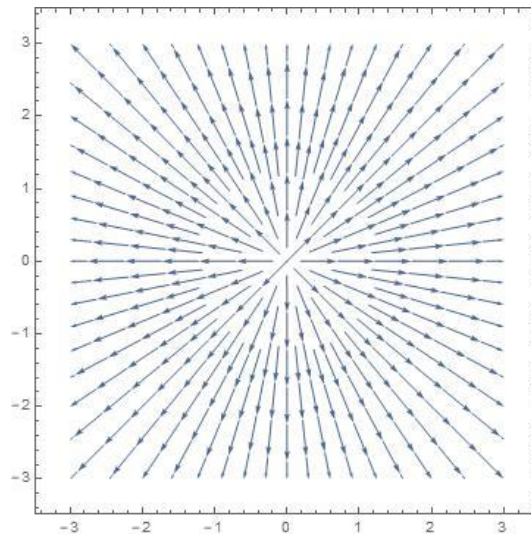


Mapping of Electric Field

Electric Field Lines

The density of electric field lines is proportional to the magnitude of the local electric field.

At large distances from a system of non-zero total charges, the field lines look as if they came from a single point charge.

Electric field lines do not cross each other.

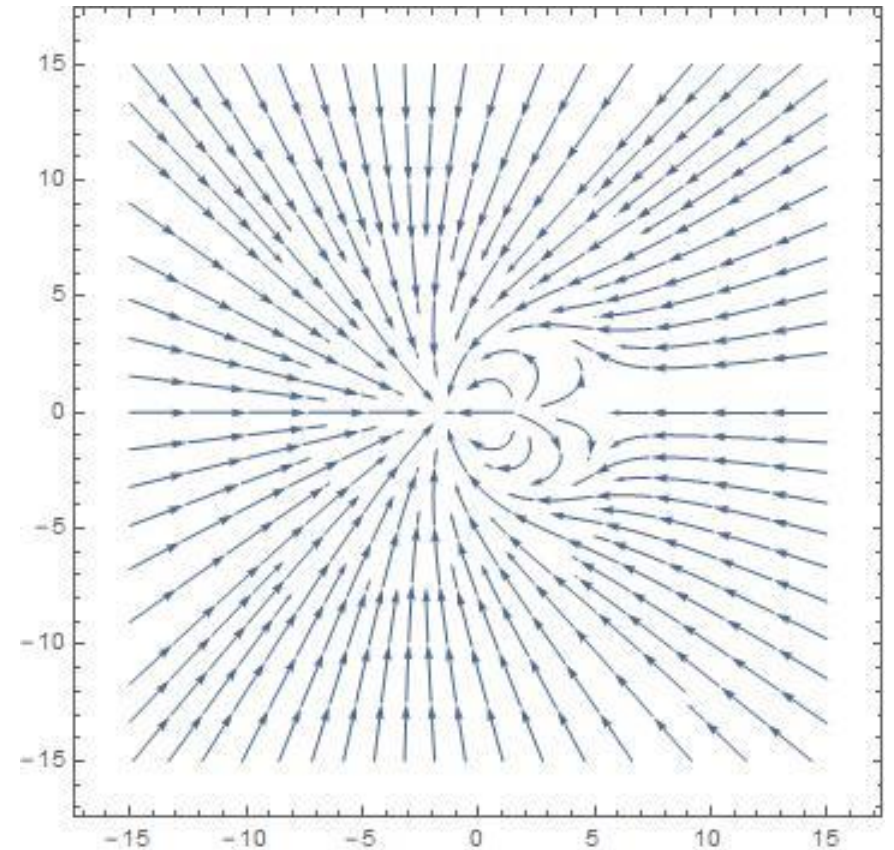

Number of “Free” Electrons in Metal

Assume that one Al atom contributes three free charges in the solid. The density and atomic weight of Al bulk are 2.70 g/cm³. and 27.0 g/mol. What is the total free charge in an Al lump with a volume of 1 cm³?

The mass of the Al lump is:

$$m = Vd = 2.7 \text{ g}$$

The number of electrons is:

$$3 \times \frac{2.7}{27} \times 6.02 \times 10^{23} = 1.8 \times 10^{23}$$

The total charge is:

$$1.602 \times 10^{-19} \times 1.8 \times 10^{23} = 2.9 \times 10^4 \text{ C}$$

Examples

The Magnitude of Coulomb's Force in Atoms

An electron is orbiting around a proton with a radius of 0.53 \AA in a hydrogen atom. Please evaluate the Coulomb force between the electron and the proton.

Coulomb's force gives us

$$F = \frac{kq_1q_2}{r^2} = -8.99 \times 10^9 \frac{(1.602 \times 10^{-19})^2}{(0.53 \times 10^{-10})^2} = -8.21 \times 10^{-8} \text{ N}$$

Examples

The Ratio Between Coulomb's and Gravitational Forces

Please calculate the ratio between Coulomb's and gravitational forces of an electron in an hydrogen atom. The orbiting radius is 0.53 \AA .

The ratio is

$$\frac{F_C}{F_G} = \frac{\frac{kq_1q_2}{r^2}}{\frac{Gm_1m_2}{r^2}} = \frac{kq_1q_2}{Gm_1m_2}$$

$$\frac{F_C}{F_G} = \frac{8.99 \times 10^9 (1.602 \times 10^{-19})^2}{(6.67 \times 10^{-11})(1.67 \times 10^{-27})(9.11 \times 10^{-31})}$$


$$\frac{F_C}{F_G} = 2.27 \times 10^{39}$$

Examples

The Balance Point

Three charged particles are placed on the x -axis. One particle of charge q_1 is placed at the origin and another particle of charge q_2 is placed at $x = l$. Where can the other particle of charge q_3 be placed with a zero net force between the first and the second particles?

Let the particle of charge q_3 be placed at a distance x away from the origin.

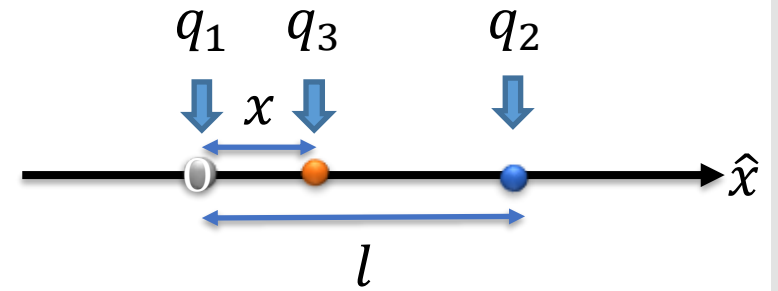

$$F_{13} = F_{23} \rightarrow \frac{kq_1q_3}{x^2} = \frac{kq_2q_3}{(l-x)^2}$$

$$q_1(l-x)^2 = q_2x^2 \rightarrow (q_1 - q_2)x^2 - 2q_1lx + q_1l^2 = 0$$


$$x = \frac{q_1 \pm \sqrt{q_1q_2}}{(q_1 - q_2)} l \rightarrow x_1 = \frac{\sqrt{q_1}}{\sqrt{q_1} + \sqrt{q_2}} l, x_2 = \frac{\sqrt{q_1}}{\sqrt{q_1} - \sqrt{q_2}} l$$

Examples

Total Electric Field

Three charged particles are placed on the x -axis. One particle of charge q_1 is placed at the origin and the other particle of charge q_2 is placed at $x = l$. Please estimate the electric field between the two particles at a distance x away from the origin

$$\vec{E} = \frac{kq_1}{x^2} \hat{i} - \frac{kq_2}{(l-x)^2} \hat{i}$$

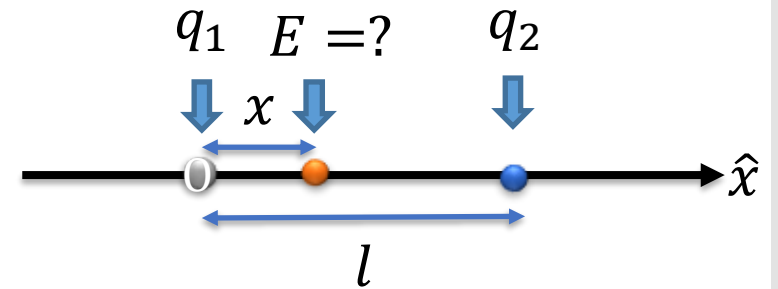


Examples

Experience The “Vector” Feature of The Electric Field

Two particles of charges 5 nC and 10 nC is placed at $x = 0$ and $x = 3$ m, respectively on the x -axis. What is the electric field observed at $y = 2$ m on the y -axis?

$$\vec{E} = 9 \times 10^9 \frac{10 \times 10^{-9}}{(2^2 + 3^2)} \left(-\frac{3}{\sqrt{2^2 + 3^2}} \hat{i} + \frac{2}{\sqrt{2^2 + 3^2}} \hat{j} \right) + 9 \times 10^9 \frac{5 \times 10^{-9}}{2^2} \hat{j}$$

$$\vec{E} = -5.76 \hat{i} + 15.1 \hat{j} \text{ (N/C)}$$

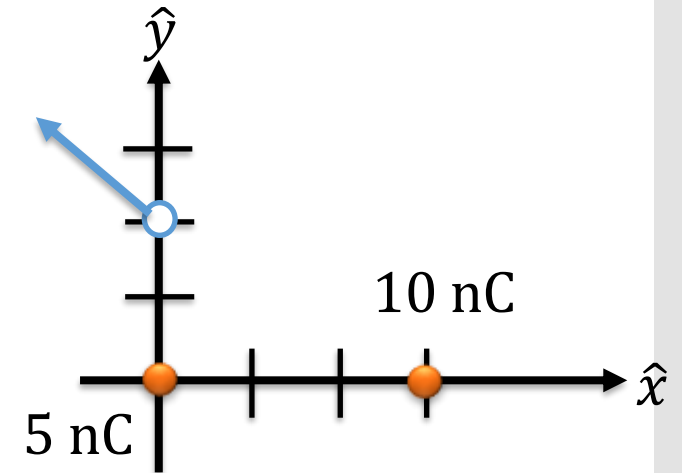

Examples

Debut of “Electric Dipole”

Examples

A charge $+q$ is placed at $x = a$ on the x -axis and a second charge $-q$ is placed at $x = -a$. (a) Find the electric field on the x -axis at an arbitrary point x , where $x > a$. (b) What is the limit result of $x \gg a$?

(a)


$$E = -\frac{kq}{(x+a)^2} + \frac{kq}{(x-a)^2}$$

(b)

$$E = kq \frac{-(x-a)^2 + (x+a)^2}{(x^2 - a^2)^2}$$

$$E = kq \frac{4xa}{(x^2 - a^2)^2}$$

$$x \gg a \rightarrow E \cong kq \frac{4xa}{x^4} = 2k \frac{2qa}{x^3}$$

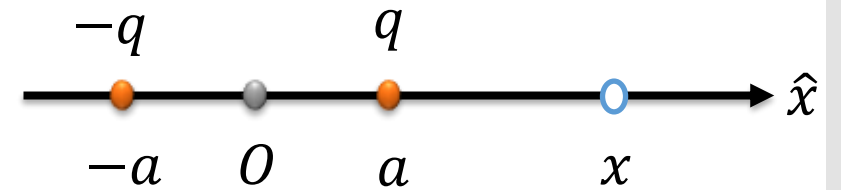

dipole moment $p = 2qa$

Cathode Ray Tube

Examples


An electron of charge $-e$ and mass m_e is moving on the central axis with a constant velocity v_0 . When it is exerted by a perpendicular, uniform electric field E_0 for a distance l along the x-axis, what is its deflection distance along the y-axis?

Estimate the time to travel through the region of uniform electric field:

$$t_{travel} = \frac{l}{v_0}$$

$$\vec{a} = -\frac{eE_0}{m_e} \hat{j}$$

$$y_{deflection} = -\frac{1}{2} \frac{eE_0}{m_e} \left(\frac{l}{v_0} \right)^2$$

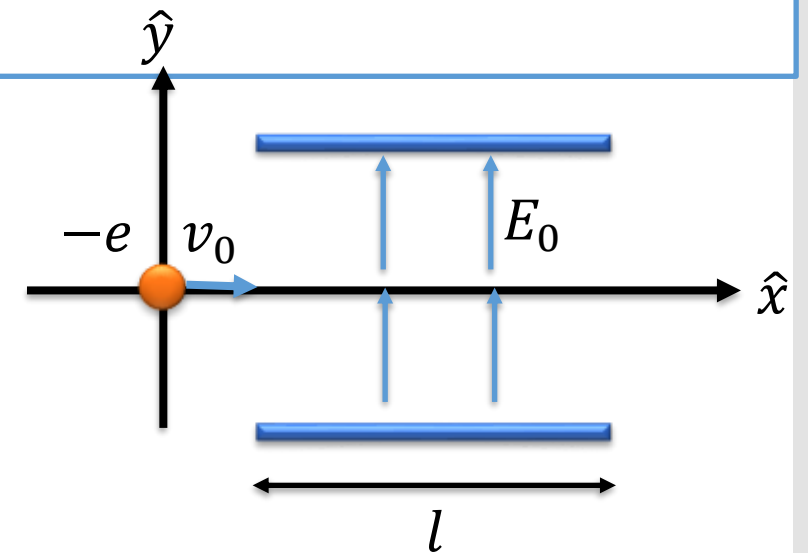

Introduction to The Mathematical Tools of Integration for Calculation of Total Electric Fields

Mathematical Calculation

Total charge of Q (C) is uniformly distributed on 1. a wire, 2. a plane, or 3. in a volume.

The charge per unit length is defined as λ , $\lambda = Q/l$, where l is the length of the wire.


The charge per unit area is defined as σ , $\sigma = Q/A$, where A is the area of the plane.

The charge per unit volume is defined as ρ , $\rho = Q/V$, where V is the volume of the object.

Introduction to The Mathematical Tools of Integration for Calculation of Total Electric Fields

Mathematical Calculation

Using of integration (for example, to get the total charge back from a wire of length l)

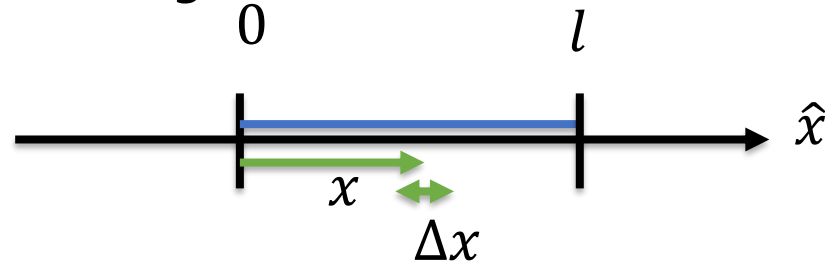

$$\begin{aligned}dq &= \lambda dx, \int dq = \int_0^l \lambda dx \\ &= \frac{Q}{l} \int_0^l dx = \frac{Q}{l} l = Q\end{aligned}$$

Using integration to get the total charge back from a rectangle of an area $a \times b$.

$$dq = \sigma da = \sigma dx dy$$

$$\int dq = \int_0^b \int_0^a \sigma dx dy$$


$$= \frac{Q}{ab} \int_0^b \int_0^a dx dy = \frac{Q}{ab} ab = Q$$



Total Electric Field of Line Charges

A rod of length l is charged with Q and placed on the axis as shown in the figure. Please calculate the electric field at the origin ($x = 0$).

$$\lambda = \frac{Q}{l}, dq = \lambda dx, d\vec{E} = -\hat{x} \frac{k dq}{r^2}$$

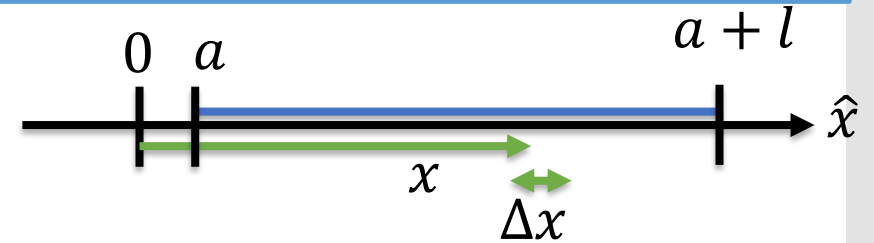

$$\vec{E} = -\hat{x} \int k \frac{dq}{r^2} = -\hat{x} k \int_a^{a+l} \frac{\lambda dx}{x^2}$$

$$\vec{E} = -\hat{x} k \lambda \left[-\frac{1}{x} \right]_{x=a}^{x=a+l} = -\hat{x} k \lambda \left(-\frac{1}{a+l} + \frac{1}{a} \right)$$

$$= -\hat{x} k \lambda \frac{l}{a(a+l)} = -\hat{x} \frac{kQ}{a(a+l)}$$

Examples

Charged Ring

Examples


A ring of radius a is charged with Q and placed on the xy plane with its axis coincident with the z -axis as shown in the figure. Please calculate the electric field on the z -axis with a distance z_0 above the origin.

According to symmetry, $E_x = E_y = 0$

$$d\vec{E} = \hat{z} \frac{k\lambda}{a^2 + z_0^2} ds \frac{z_0}{\sqrt{a^2 + z_0^2}} \quad ds = a d\theta$$

$$\vec{E} = \hat{z} \int_0^{2\pi} \frac{k\lambda z_0}{(a^2 + z_0^2)^{3/2}} a d\theta = \hat{z} \frac{k2\pi a \lambda z_0}{(a^2 + z_0^2)^{3/2}}$$

$$= \hat{z} \frac{kQ z_0}{(a^2 + z_0^2)^{3/2}}$$

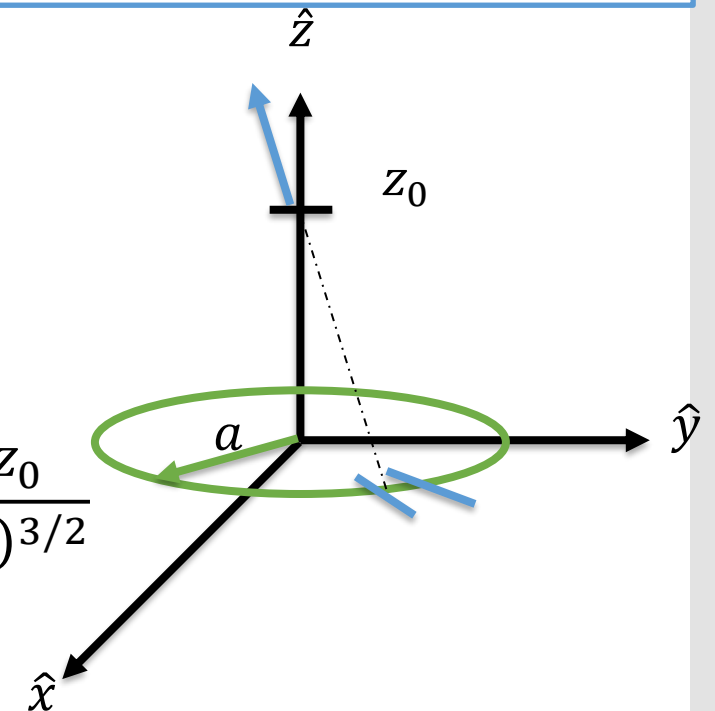


Line Charge, Observer on The Axis of The Line Charge

A rod of length l is uniformly charged with Q and placed on the axis as shown in the figure. Please calculate the electric field at x_p .

$$\lambda = \frac{Q}{l}, dq = \lambda dx = \frac{Q}{l} dx$$

$$d\vec{E} = \frac{k dq}{(x_p - x)^2} \hat{x} = \frac{k \lambda dx}{(x_p - x)^2} \hat{x}$$

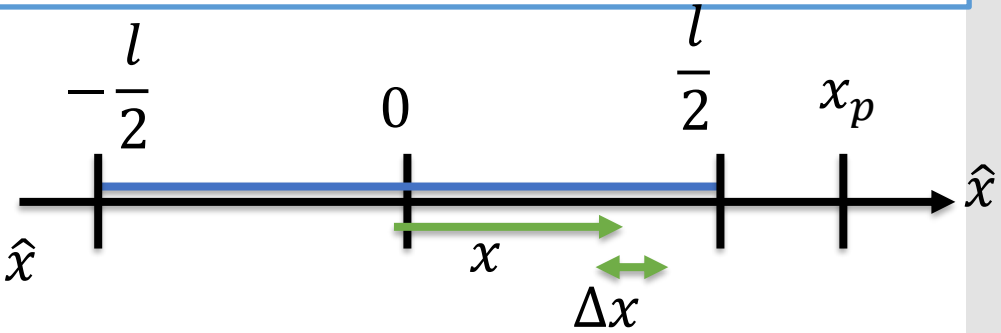

$$\vec{E} = \hat{x} \int_{-l/2}^{l/2} \frac{k \lambda dx}{(x_p - x)^2} = \hat{x} k \lambda \int_{-l/2}^{l/2} \frac{d(x - x_p)}{(x - x_p)^2}$$

$$= \hat{x} k \lambda \left[-\frac{1}{x - x_p} \right]_{x=-l/2}^{x=l/2} = \hat{x} k \lambda \left(-\frac{1}{\frac{l}{2} - x_p} + \frac{1}{-\frac{l}{2} - x_p} \right)$$

$$= \hat{x} k \lambda \left(\frac{1}{x_p - \frac{l}{2}} - \frac{1}{x_p + \frac{l}{2}} \right) = \frac{\hat{x} k \lambda l}{x_p^2 - \frac{l^2}{4}}$$

Examples


Line Charge, Off The Axis of The Line Charge

A rod of length l is charged with Q and placed on the x -axis as shown in the figure. Please calculate the electric field at the y -axis with a distance of y_0 away from the origin.

$$d\vec{E} = \frac{k dq}{r^2} \hat{r}$$

$$= \frac{k \lambda dx}{x^2 + y_0^2} \left(-\hat{x} \frac{x}{\sqrt{x^2 + y_0^2}} + \hat{y} \frac{y_0}{\sqrt{x^2 + y_0^2}} \right)$$

$$\vec{E} = k \lambda \int_a^{a+l} \left(-\hat{x} \frac{x}{(x^2 + y_0^2)^{\frac{3}{2}}} + \hat{y} \frac{y_0}{(x^2 + y_0^2)^{\frac{3}{2}}} \right) dx$$

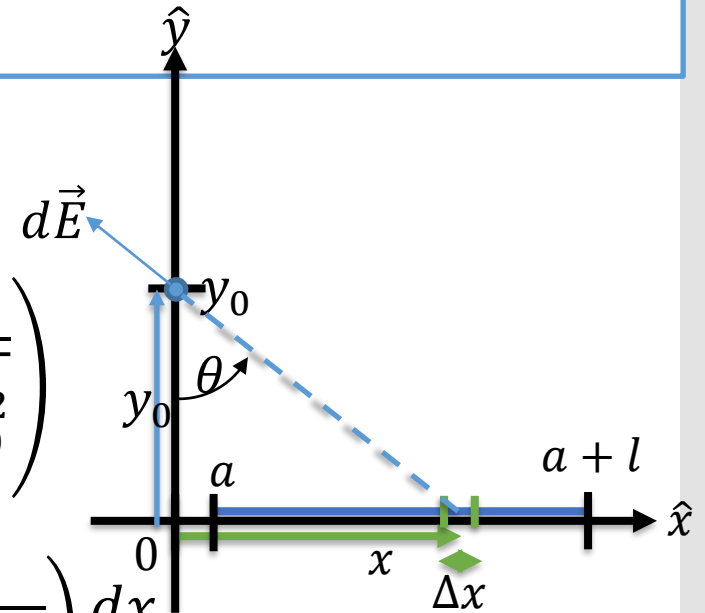

Let $\frac{x}{y_0} = \tan \theta$ and $\frac{a}{y_0} = \tan(\theta_1)$, $\frac{a+l}{y_0} = \tan(\theta_2)$

Examples

Line Charge, Off The Axis of The Line Charge

A rod of length l is charged with Q and placed on the x-axis as shown in the figure. Please calculate the electric field at the y-axis with a distance of y_0 away from the origin.

$$x = y_0 \tan \theta \rightarrow dx = y_0 \sec^2 \theta d\theta$$

$$\vec{E} = k\lambda \int_{\theta_1}^{\theta_2} \left(-\hat{x} \frac{y_0 \tan \theta}{y_0^3 \sec^3 \theta} + \hat{y} \frac{y_0}{y_0^3 \sec^3 \theta} \right) y_0 \sec^2 \theta d\theta$$

$$\vec{E} = \frac{k\lambda}{y_0} \int_{\theta_1}^{\theta_2} (-\hat{x} \sin \theta + \hat{y} \cos \theta) d\theta$$

$$= \frac{k\lambda}{y_0} [\hat{x} \cos \theta + \hat{y} \sin \theta]_{\theta=\theta_1}^{\theta=\theta_2}$$

$$= \frac{k\lambda}{y_0} (\hat{x}(\cos \theta_2 - \cos \theta_1) + \hat{y}(\sin \theta_2 - \sin \theta_1))$$

Examples

Infinitely Long Line of Charge

A rod of length l is charged with Q and placed on the x-axis as shown in the figure. Please calculate the electric field at the y-axis with a distance of y_0 away from the origin.

$$\vec{E} = \frac{k\lambda}{y_0} (\hat{x}(\cos \theta_2 - \cos \theta_1) + \hat{y}(\sin \theta_2 - \sin \theta_1))$$

$$\tan \theta_1 = -\frac{\infty}{y_0} \rightarrow \theta_1 = -\frac{\pi}{2}$$

$$\tan \theta_2 = \frac{\infty}{y_0} \rightarrow \theta_2 = \frac{\pi}{2}$$

$$\vec{E} = \frac{k\lambda}{y_0} \left(\hat{x} \left(\cos \left(\frac{\pi}{2} \right) - \cos \left(-\frac{\pi}{2} \right) \right) + \hat{y} \left(\sin \left(\frac{\pi}{2} \right) - \sin \left(-\frac{\pi}{2} \right) \right) \right)$$

$$\vec{E} = 2 \frac{k\lambda}{y_0} \hat{y}$$

Examples

Symmetrically Displaced Line Charge, Off The Axis


A rod of length l is charged with Q and placed on the x -axis as shown in the figure. Please calculate the electric field at the y -axis with a distance of y_0 away from the origin.

$$E_x = 0 \rightarrow \lambda = \frac{Q}{l}, d\vec{E} = \hat{y} \frac{k\lambda y_0 dx}{(x^2 + y_0^2)^{3/2}}, x = y_0 \tan \theta$$

$$\vec{E} = \hat{y} 2k\lambda \int_0^{\tan^{-1}(l/2y_0)} \frac{y_0}{y_0^3 \sec^3 \theta} y_0 \sec^2 \theta d\theta$$

$$\vec{E} = \hat{y} \frac{2k\lambda}{y_0} \int_0^{\tan^{-1}(l/2y_0)} \cos \theta d\theta$$

$$\vec{E} = \hat{y} \frac{2k\lambda}{y_0} \frac{\frac{l}{2}}{\sqrt{y_0^2 + \frac{l^2}{4}}}$$

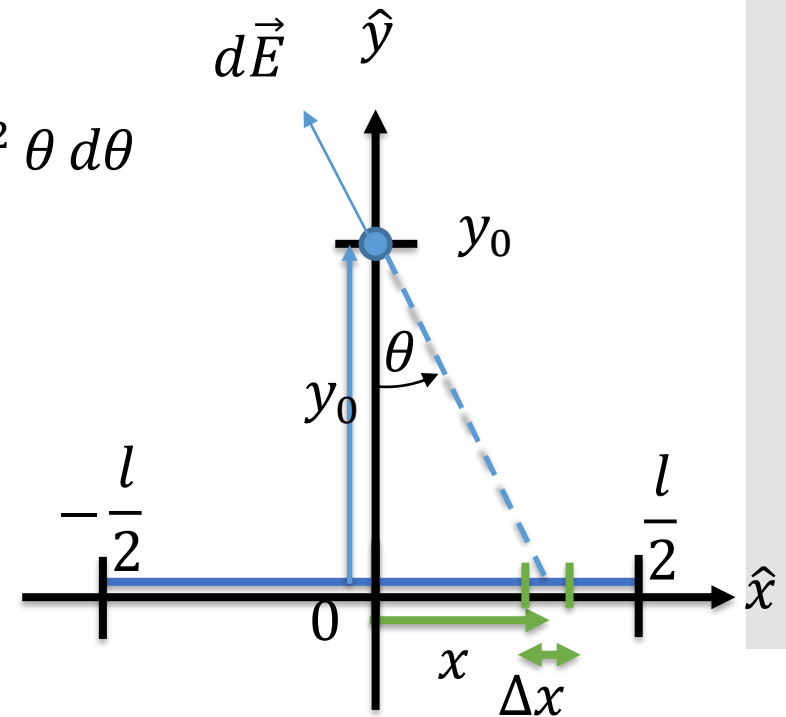

Examples

Charge on The Semicircular Arc


A uniformly charged insulating rod of length L is bent into the shape of a semicircle. The rod has a total charge of Q . Find the electric field at the center of the semicircle.

Examples

$$L = \pi r \rightarrow r = \frac{L}{\pi}$$

$$d\vec{E} = -\frac{k dq}{r^2} (\cos \theta \hat{i} + \sin \theta \hat{j})$$

$$dq = \lambda ds = \lambda(r d\theta) \text{ \& } \lambda = \frac{Q}{L}$$

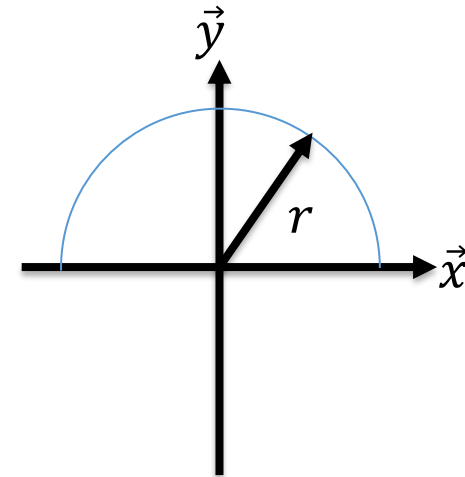

$$\vec{E} = -\int_0^\pi \frac{k}{r^2} (\cos \theta \hat{x} + \sin \theta \hat{y}) \lambda r d\theta = -2 \frac{k\lambda}{r} \hat{y} = -\frac{2k \left(\frac{Q}{L}\right)}{\left(\frac{L}{\pi}\right)} \hat{y} = -\frac{2\pi k Q}{L^2} \hat{y}$$

Charged Disc


Examples

A disk of radius R is charged with Q and placed on the xy plane with its axis coincident with the z -axis as shown in the figure. Please calculate the electric field on the z -axis with a distance z_0 above the origin.

$$\sigma = \frac{Q}{\pi R^2} \quad E_x = E_y = 0 \quad d\vec{E} = \hat{z} \frac{k(2\pi r \sigma dr)}{r^2 + z_0^2} \frac{z_0}{\sqrt{r^2 + z_0^2}}$$
$$\vec{E} = \hat{z} 2\pi k \sigma z_0 \int_0^R \frac{r dr}{(r^2 + z_0^2)^{3/2}}$$

$$= \hat{z} 2\pi k \sigma z_0 \left[-\frac{1}{\sqrt{r^2 + z_0^2}} \right]_{r=0}^{r=R}$$

$$= \hat{z} 2\pi k \sigma z_0 \left(\frac{1}{z_0} - \frac{1}{\sqrt{R^2 + z_0^2}} \right)$$

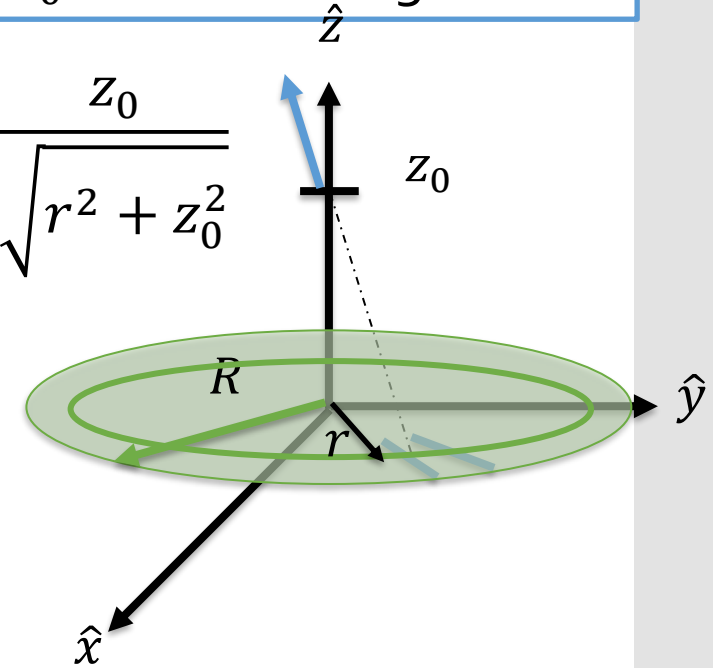

Charged Disc


Examples

A disk of radius R is charged with Q and placed on the xy plane with its axis coincident with the z -axis as shown in the figure. Please calculate the electric field on the z -axis with a distance z_0 above the origin.

$$\vec{E} = \hat{z} 2\pi k \sigma z_0 \left(\frac{1}{z_0} - \frac{1}{\sqrt{R^2 + z_0^2}} \right)$$

$$\lim_{R \rightarrow \infty} \vec{E}(R) = \lim_{R \rightarrow \infty} \hat{z} 2\pi k \sigma z_0 \left(\frac{1}{z_0} - \frac{1}{\sqrt{R^2 + z_0^2}} \right)$$

$$\lim_{R \rightarrow \infty} \vec{E}(R) = \hat{z} 2\pi k \sigma$$

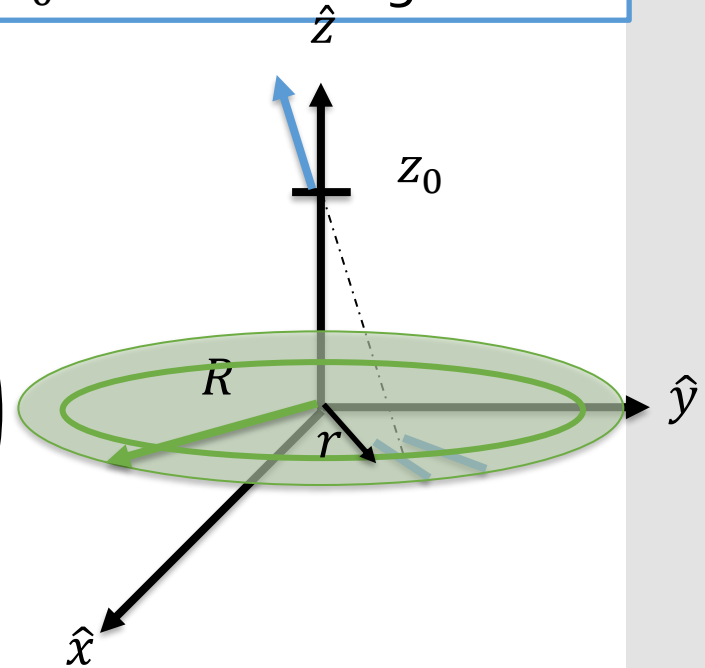

Line Charge, Observer on The Axis of The Line Charge

Identical thin rods of length $2a$ carry equal charges $+Q$ uniformly distributed along their lengths. The rods lie along the x -axis with their centers separated by a distance b ($b > a$). Please calculate the magnitude of the force exerted by the left rod on the right one.


two variables of infinitesimal charges
 dq_1 and dq_2

$$dF = k \frac{dq_1 dq_2}{r^2}$$

$$dF = k \frac{\lambda dx_1 \lambda dx_2}{(x_1 - x_2)^2} \quad F = k \int_{b-a}^{b+a} \int_{-a}^a \frac{\lambda dx_1 \lambda dx_2}{(x_1 - x_2)^2}$$

$$F = k\lambda^2 \int_{b-a}^{b+a} \left[\int_{-a}^a \frac{d(x_1 - x_2)}{(x_1 - x_2)^2} \right] dx_2$$

$$F = k\lambda^2 \int_{b-a}^{b+a} \left[\left(-\frac{1}{x_1 - x_2} \right)_{x_1=-a}^{x_1=a} \right] dx_2 = k\lambda^2 \int_{b-a}^{b+a} \left(-\frac{1}{a - x_2} + \frac{1}{-a - x_2} \right) dx_2$$

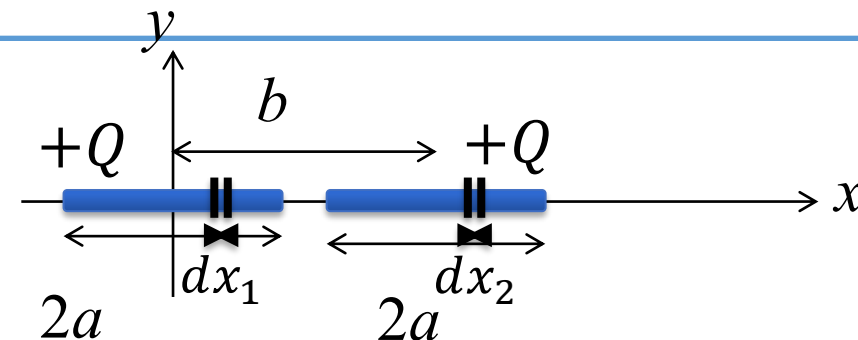

Challenge
Problems

Line Charge, Observer on The Axis of The Line Charge

Identical thin rods of length $2a$ carry equal charges $+Q$ uniformly distributed along their lengths. The rods lie along the x -axis with their centers separated by a distance b ($b > a$). Please calculate the magnitude of the force exerted by the left rod on the right one.


Challenge Problems

$$F = k\lambda^2 \int_{b-a}^{b+a} \left(\frac{1}{x_2 - a} - \frac{1}{x_2 + a} \right) dx_2$$

$$= k\lambda^2 \left[\ln \left(\frac{x_2 - a}{x_2 + a} \right) \right]_{b-a}^{b+a}$$

$$= k\lambda^2 \left(\ln \left(\frac{b}{b+2a} \right) - \ln \left(\frac{b-2a}{b} \right) \right)$$


$$= k\lambda^2 \left(\ln \left(\frac{b}{b+2a} \frac{b}{b-2a} \right) \right) = k\lambda^2 \ln \left(\frac{b^2}{b^2 - 4a^2} \right)$$

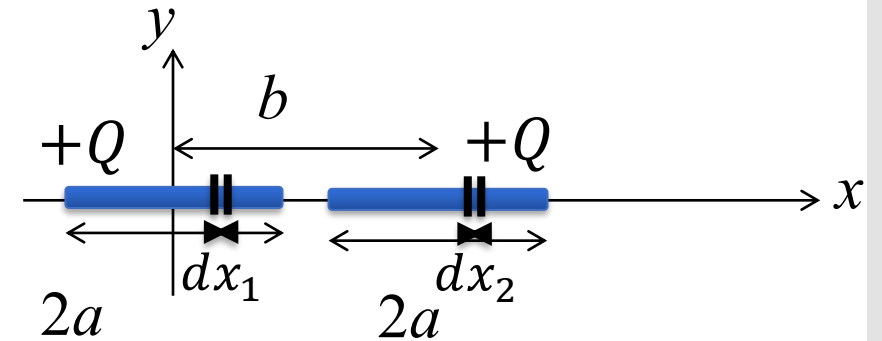

Electric Force to Torque

Challenge Problems

An electric dipole in a uniform horizontal electric field is displaced slightly from its equilibrium position for a small angle θ . The separation of the charges ($+q$ and $-q$) is $2a$, and each of the two particles has mass m . (a) Assume the dipole is released from the non-equilibrium position with a small angle θ , please calculate the frequency of the simple harmonic motion along its angular orientation. (b) What will it be if the masses of the two particles, m_1 and m_2 , are different?

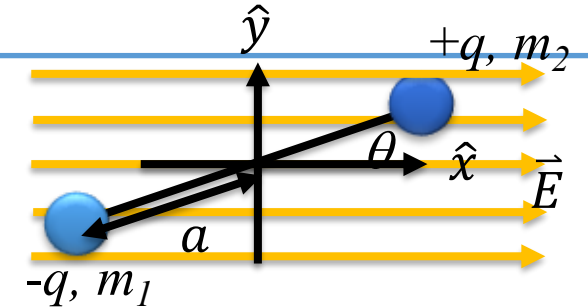

$$\vec{F}_1 = -qE\hat{x} \rightarrow \vec{\tau}_1 = -qEa \sin \theta \hat{z}$$

$$\vec{F}_2 = qE\hat{x} \rightarrow \vec{\tau}_2 = -qEa \sin \theta \hat{z}$$

$$\vec{\tau} = -2qEa \sin \theta \hat{z} \quad I = ma^2 + ma^2$$

$$I\alpha = -2qEa \sin \theta \rightarrow I \frac{d^2\theta}{dt^2} + 2qEa \sin \theta = 0$$

small angle assumption for $\theta \rightarrow$
$$I \frac{d^2\theta}{dt^2} + 2qEa\theta = 0$$


compare with the differential equation $m \frac{d^2x}{dt^2} + kx = 0$ with the solution $\omega = \sqrt{\frac{k}{m}}$

$$\omega = \sqrt{\frac{2qEa}{2ma^2}} = \sqrt{\frac{qE}{ma}} \rightarrow f = \frac{1}{2\pi} \sqrt{\frac{qE}{ma}}$$

Electric Force to Torque

Challenge Problems

An electric dipole in a uniform horizontal electric field is displaced slightly from its equilibrium position for a small angle θ . The separation of the charges ($+q$ and $-q$) is $2a$, and each of the two particles has mass m . (a) Assume the dipole is released from the non-equilibrium position with a small angle θ , please calculate the frequency of the simple harmonic motion along its angular orientation. (b) What will it be if the masses of the two particles, m_1 and m_2 , are different?

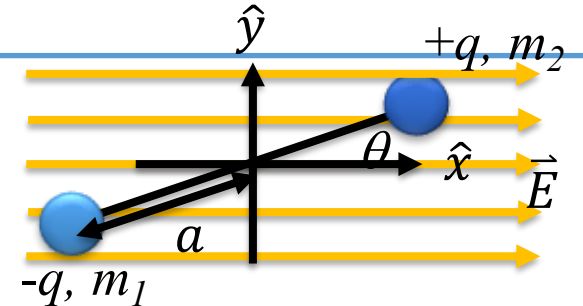

$$\vec{\tau} = 2qEa \sin \theta \hat{z}$$

$$I_O = m_1 a^2 + m_2 a^2, x_{CM} = \frac{m_2 a - m_1 a}{m_1 + m_2}$$

$$I_O = I_{CM} + (m_1 + m_2) x_{CM}^2 \rightarrow I_{CM} = (m_1 + m_2) a^2 - \frac{(m_1 - m_2)^2}{m_1 + m_2} a^2$$

$$I_{CM} = \frac{4m_1 m_2}{m_1 + m_2} a^2 \quad I \frac{d^2 \theta}{dt^2} + 2qEa \theta = 0$$

$$\omega = \sqrt{\frac{2qEa}{\frac{4m_1 m_2}{m_1 + m_2} a^2}} = \sqrt{\frac{qE(m_1 + m_2)}{2m_1 m_2 a}} \rightarrow f = \frac{1}{2\pi} \sqrt{\frac{qE(m_1 + m_2)}{2m_1 m_2 a}}$$


Electric Force to Torque

Challenge Problems

A particle of mass m and charge q moves at high speed along the x axis. It is initially near $x = -\infty$, and it ends up near $x = +\infty$. A second charge Q is fixed at the point $(0, -d)$. As the moving charge passes the stationary charge, its x component of velocity does not change appreciably, but it acquires a small velocity in the y direction. Determine the angle through which the moving charge is deflected from the direction of its initial velocity.

$$v_y = ? \quad \rightarrow \int a_y dt$$

$$F_y = \frac{kqQ}{(x^2 + d^2)^{3/2}} d \rightarrow a_y = \frac{1}{m} \frac{kqQd}{(x^2 + d^2)^{3/2}}$$

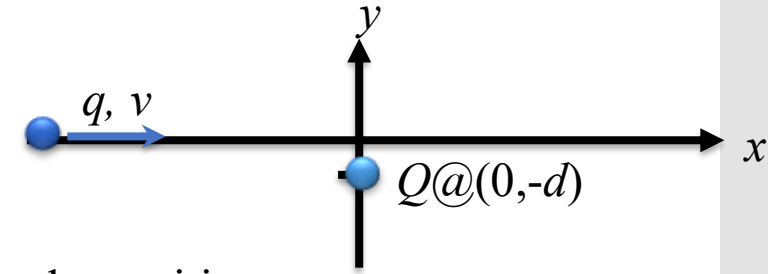

we don't know exactly the elapsed time but we know the position

$$\int a_y dt = \int a_y \frac{dx}{v} \rightarrow v_y = \int_{-\infty}^{\infty} \frac{1}{m} \frac{kqQd}{(x^2 + d^2)^{3/2}} \frac{dx}{v}$$

$$v_y = \frac{kqQd}{mv} \int_{-\infty}^{\infty} \frac{1}{(x^2 + d^2)^{3/2}} dx$$

$$\text{let } \frac{x}{d} = \tan \theta \quad v_y = \frac{kqQd}{mv} \int_{-\pi/2}^{\pi/2} \frac{1}{d^3 \sec^3 \theta} d \sec^2 \theta d\theta$$

Electric Force to Torque

Challenge Problems

A particle of mass m and charge q moves at high speed along the x axis. It is initially near $x = -\infty$, and it ends up near $x = +\infty$. A second charge Q is fixed at the point $(0, -d)$. As the moving charge passes the stationary charge, its x component of velocity does not change appreciably, but it acquires a small velocity in the y direction. Determine the angle through which the moving charge is deflected from the direction of its initial velocity.

$$v_y = \frac{kqQd}{mv} \int_{-\pi/2}^{\pi/2} \frac{\cos \theta}{d^2} d\theta$$

$$v_y = \frac{2kqQ}{mvd}$$

$$\tan \theta = \frac{v_y}{v_x} = \frac{2kqQ/mvd}{v} = \frac{2kqQ}{mv^2d}$$

